




User's guide

Drucktech KIH 70/200 dryer



H-3104 Salgótarján, Ipari Park
Park utca 11
Tel.: (00-36)32/512-777
Fax: (00-36)32/443-377

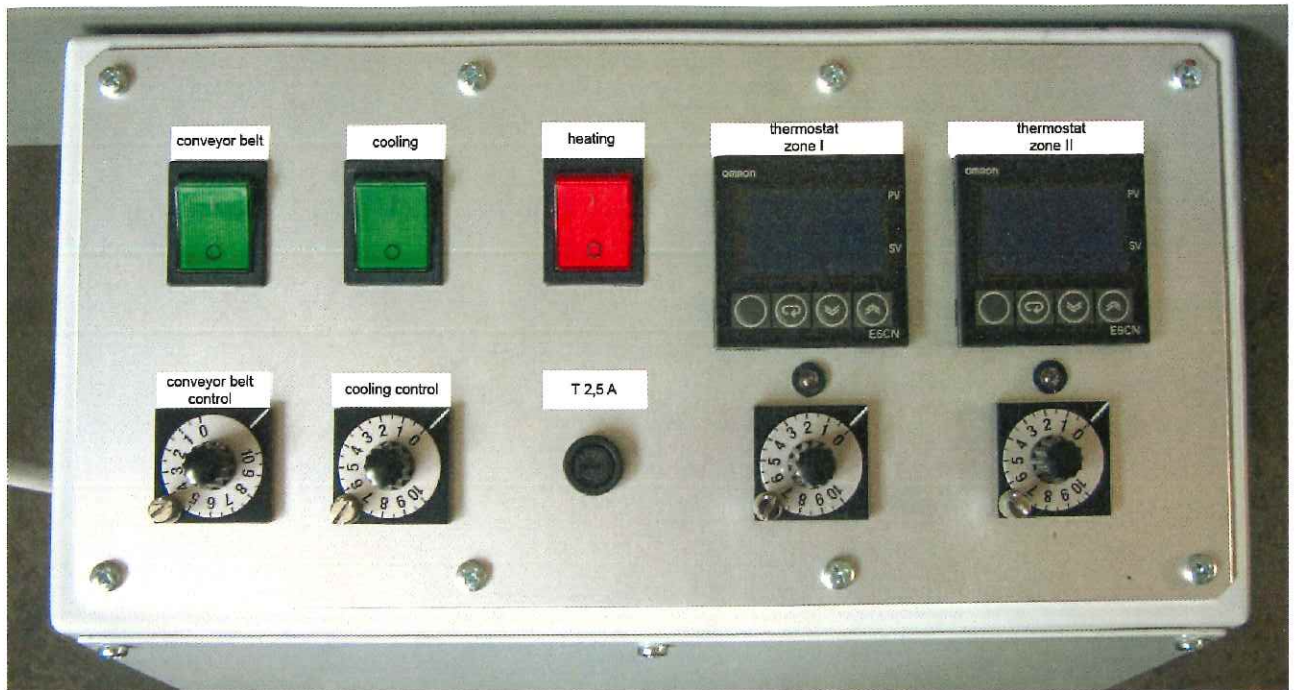

The temperature control is programmed by manufacturer, so there is no need for new programming. Any breakdown caused by wrong programming will result in guarantee losing.

After finishing work, switch OFF the main switch and disconnect from main power supply.

Don't open the heating zone cover until the machine body does not cool down!

Operational instruction

The IR dryer with quartz tubes is a quality product.

Please read the user's guide carefully and keep the instructions.

Outside dimensions, space requirement:

(wide / length / high)
1 130 mm x 3 600 mm x 1 300 mm

Technical datas:

Work high:	900 mm
Work wide:	700 mm (teflon belt)
Feeder lenght:	660 mm
Hot lenght:	2000 mm
Cool lenght:	500 mm
Delivery:	750 mm
Power:	10 kW
Belt motor:	Two speed level DC motor
Cooling:	6 adjustable fans, 15W AC motors
Vacuum:	4 fans 35W AC motors
Heating:	10x1000W quartz tube infra red

Electric shock protection: I. ÉV. Class

Materials: The base structure is a steel construction, the reflectors are made of reflected aluminum and other parts are galvanized plate construction.